

BALANCES.COM

STAINLESS STEEL WASHDOWN SCALES



SK-5000WPZ SERIES

A&D
A&D WEIGHING
...Clearly a Better Value

SK-WP SERIES

SK-WP Scales are tough, sanitary and portable

SK-WP Scales are fast, accurate and easy to use. All SK-WP models are built to withstand the toughest food service, food processing, chemical and outdoor environments.



Features of all SK-WP models:

- Stainless steel housing
- Dustproof and waterproof (IP65)
- Portable (6 D-type batteries, not included)
- Large, easy-to-read LCD display (25mm)
- Stainless steel removable weigh pan (quick, easy cleaning)
- NSF Certified; Sanitary for food processing & food service
- Temperature compensated (for use near ovens or in refrigerated areas)
- Unbeatable two (2) year warranty
- Legal-For-Trade (certain models)
- Full scale push-button Tare/Zero
- Net weight & stability indicators
- Low battery indicator
- Auto Power Off
- AC adapter (optional, non-washdown)

STAINLESS STEEL WASHDOWN SCALES

Why choose an SK-WP Series Digital Scale instead of a mechanical scale?

- SK-WP models have no moving parts that wear out or lose calibration.
- SK-WP models offer quick response; weight displays are easy to read.
- SK-WP models have full-scale pushbutton tare.
- SK-WP models have multiple units of measure; select from lb, kg/g.
- Sk-WPZ models also offer lb/oz (both decimal and fractional).



Removable stainless steel weighing pan with rugged pan support.

Sealed internal components for maximum moisture protection.

Stainless steel outer housing.

Your choice of Weighing Modes:



Lb mode, SK-WP models



Metric mode, SK-WP models



Lb/decimal oz mode, SK-WPZ models



Lb/fractional oz mode, SK-WPZ models

SK-WP Series Weighs in lb and metric.

| Model | Capacity / Resolution | |
|-----------|-----------------------|------------------|
| | lb | metric |
| SK-1000WP | 2.2 lb x 0.001 lb | 1000 g x 0.5 g |
| SK-2000WP | 4.4 lb x 0.002 lb | 2000 g x 1 g |
| SK-5000WP | 11 lb x 0.005 lb | 5000 g x 2 g |
| SK-10KWP | 22 lb x 0.01 lb | 10 kg x 0.005 kg |
| SK-20KWP | 44 lb x 0.02 lb | 20 kg x 0.01 kg |

SK-WPZ Series Includes ounce modes; select from decimal or fractional oz.

| Model | Capacity | | Resolution | | | |
|------------|------------|--------|------------|------------|--------------|---------|
| | lb / oz | metric | lb | decimal oz | fraction oz. | metric |
| SK-2000WPZ | 4 lb, 6 oz | 2000 g | 0.002 lb | 0.1 oz | 1/16 oz | 1 g |
| SK-5000WPZ | 11 lb | 5000 g | 0.005 lb | 0.1 oz | 1/8 oz | 2 g |
| SK-20KWPZ | 44 lb | 20 kg | 0.02 lb | 1 oz | 1 oz | 0.01 kg |

SK-WP Series Specifications

| | SK-1000WP | SK-2000WP | SK-5000 WP | SK-5001 WP | SK-10KWP | SK-20KWP |
|-----------------------|--|-------------|------------|------------|----------------|---------------|
| Capacity | 1000g/2.2lb | 2000g/4.4lb | 5000g/11lb | 5000g | 10kg/22lb | 20kg/44lb |
| Resolution | 0.5g/0.001lb | 1g/0.002lb | 2g/0.005lb | 1g | 0.005kg/0.01lb | 0.01kg/0.02lb |
| Linearity | ± 1g | ± 2g | ± 4g | ± 4g | ± 0.01kg | ± 0.02kg |
| Display | 25mm/ .98 inch, 7 segment LCD | | | | | |
| Dimensions | 146 (H) x 266 (W) x 280 (D) mm / 5.75 (H) x 10.5 (W) x 11 (D) inches | | | | | |
| Pan Size | 230 (W) x 190 (D) mm / 9.1 (W) x 7.5 (D) inches | | | | | |
| Battery Life | 600 hours with manganese type cells*, 1200 hours with alkaline type cells* (* approx.) | | | | | |
| Operating Temperature | -10° C - 40° C / 14° F - 104° F RH less than 85% | | | | | |
| Weight | Approx. 2.9 kg. / 6.4 lb | | | | | |
| Calibration Mass | 1000g | 2000g | 5000g | 5000g | 10kg | 20kg |
| Power | 6 "D" size batteries (not included) or FV-05 AC adapter (option) | | | | | |

SK-WPZ Series Specifications

| | SK-2000WPZ | SK-5000WPZ | SK-20KWPZ |
|-----------------------|--|------------------------|-------------------|
| Capacity | 2000g/4.4lb/4lb 6oz | 11lb | 44lb |
| Resolution | 1g/0.002lb/0.1oz/1/16oz | 2g/0.005lb/0.1oz/1/8oz | 0.01kg/0.02lb/1oz |
| Linearity | ± 2g | ± 4g | ± 0.02kg |
| Display | 25mm/ 1 inch, 7 segment LCD | | |
| Dimensions | 146 (H) x 266 (W) x 280 (D) mm / 5.75 (H) x 10.5 (W) x 11 (D) inches | | |
| Pan Size | 230 (W) x 190 (D) mm / 9.1 (W) x 7.5 (D) inches | | |
| Battery Life | 600 hours with manganese type cells*, 1200 hours with alkaline type cells* (* approx.) | | |
| Operating Temperature | -10° C - 40° C / 14° F - 104° F RH less than 85% | | |
| Weight | 2.9 kg. / 6.4 lb | | |
| Calibration Mass | 2000g | 5000g | 20kg |
| Power | 6 "D" size batteries (not included) or FV-05 AC adapter (option) | | |

Options: AC Adapters

- FV-05, 110 Volt (Power transformer is not waterproof)
- FV-06, 220 Volt (Power transformer is not waterproof)


Approvals:

- NTEP CC#98-086A2 Canadian pending, except SK-5001WP and SK-WPZ models
- NSF



Physical Dimensions (mm/inches)

146 (H) x 266 (W) x 280 (D) mm
5.75 (H) x 10.5 (W) x 11 (D) inches

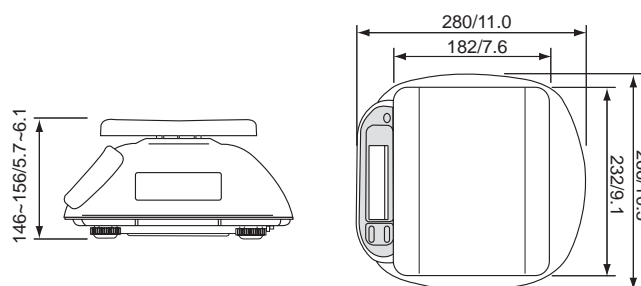

Specifications subject to change without notice.